


接入网用中心束管式光缆 (CTAC) Central Tube Access Cable

光纤被包裹在松套管中，周边均匀包裹阻水玻璃纱，最后加阻燃外护套。

The fibers are positioned in a loose tube, then wrapped by some water blocking glass yarns. Finally is completed with a LSZH outer sheath.

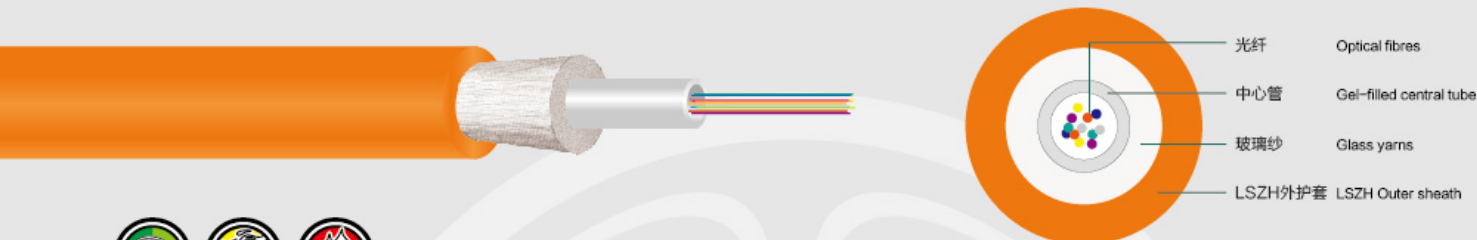

敷设方式 Installation

直埋，管道 Direct buried, Duct

产品特点 Characteristics

1. 光缆外径小，重量轻 Small outer diameter, light weight
2. 良好的抗压和抗拉性能 Excellent mechanical performance
3. 弯曲性能好 Good bending performance
4. 采用低烟无卤阻燃材料，阻燃性能优异 Used the LSZH material, excellent flame-retardant performance

应用范围 Applications

室内布线直至用户终端 FTTH

温度范围 Temperature Range

存储温度 Transportation	安装温度 Installation	运行温度 In use
-40℃~+70℃	-15℃~+50℃	-30℃~+60℃

规格 Spec	光纤数量 Fibre count	外径 Outer diameter mm	重量 Mass kg/km	最小弯曲半径 Minimum bend radius		允许拉伸力 Tensile strength		允许压扁力 Crush resistance N/10cm
				动态 Dynamic mm	静态 Static mm	短期 short term N		
CTAC	1-4	5.5	31	20D	10D	800		4000
CTAC	6-12	6.0	37	20D	10D	800		4000

注：以上参数仅作参考。

Remark: The above datasheets are just for reference.